



## FAQ

Frequently asked questions

---

No communication



## Wi-Fi

## No communication


**Question:**

Even though my PC is correctly connected to one AiM device via WiFi, the User Interface of Race Studio 3 does not report it. Any idea about this issue?

**Answer:**


When two devices are correctly connected via WiFi and they can't communicate one another is probably because your PC WiFi port address is in static mode. You need to convert it to dynamic.

- Open "Network and Sharing Center" in the windows search engine.

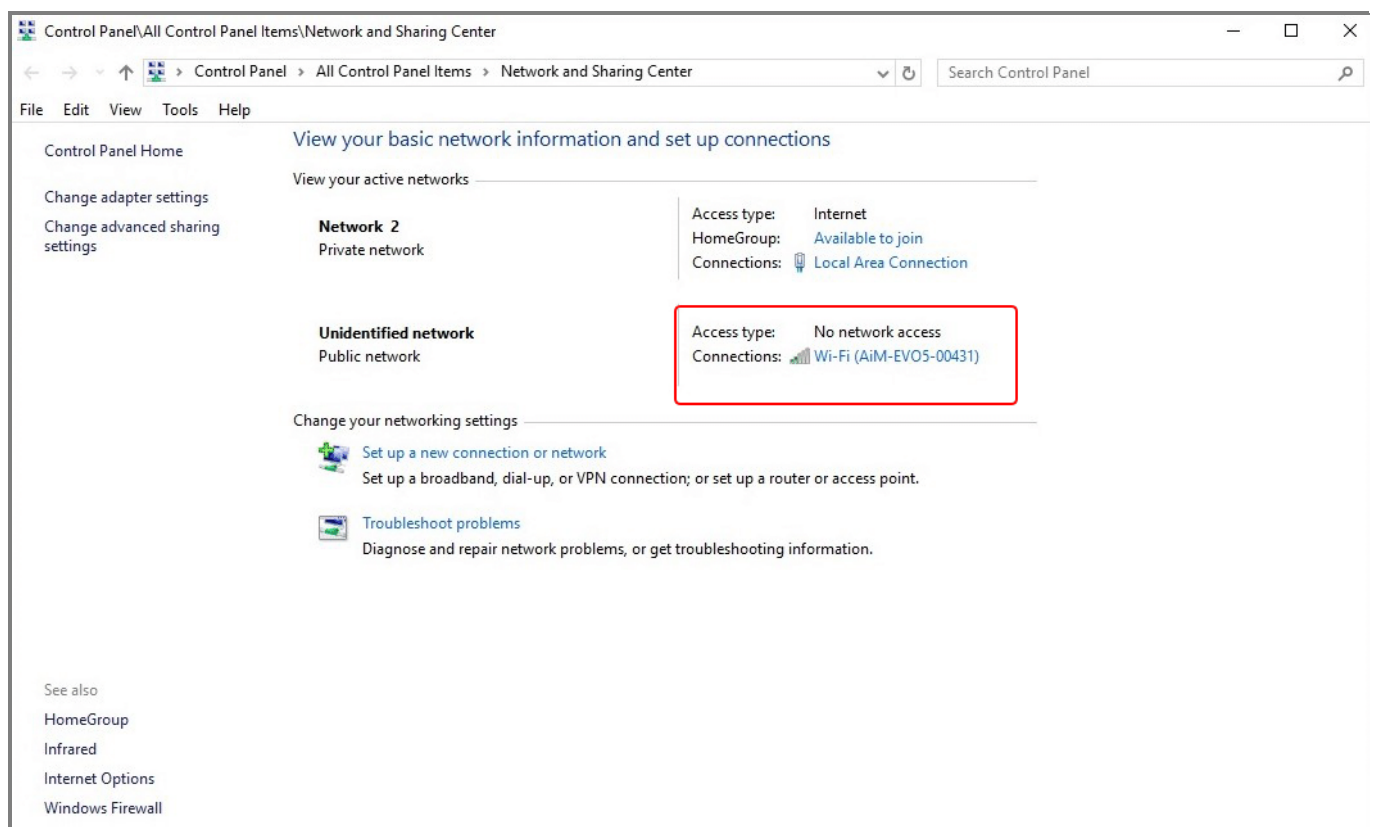

## Wi-Fi

- Click on the Wi-Fi connection and the panel below on the left shows up: click “Properties”
- Double click on “Internet Protocol Version 4 (TCP/IPv4)” as in the image below on the right

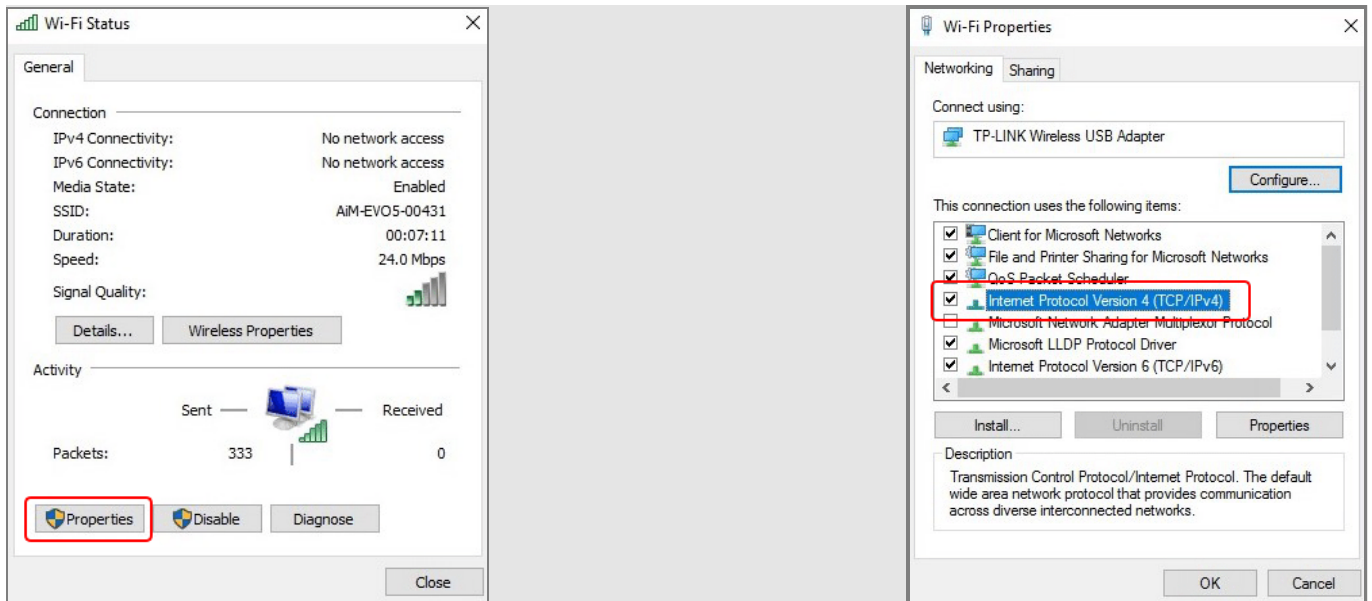

- Verify that option “Obtain an IP address automatically” is selected.

